



F&F Filipowski L.P.  
Konstantynowska 79/81, 95-200 Pabianice, POLAND  
phone/fax (+48 42) 215 23 83 / (+48 42) 227 09 71  
www.fif.com.pl; e-mail: biuro@fif.com.pl

## BIS-411 2Z 24V

Bistable relay



5190831215945741

**Do not dispose of this device in the trash along with other waste!** According to the Law on Waste, electro coming from households free of charge and can give any amount to up to that end point of collection, as well as to store the occasion of the purchase of new equipment (in accordance with the principle of old-for-new, regardless of brand). Electro thrown in the trash or abandoned in nature, pose a threat to the environment and human health.



### Purpose

Electronic bistable pulse relay BIS-411 2Z allows switching on or off the lighting or other device from several different points by parallel connected, momentary (bell) control switches.

### Functioning

The receiver is switched on after a current pulse caused by pressing any momentary (bell) button connected to the relay. After the next pulse, the receiver will be switched off.

The relay does not have a "memory" of the contact position, which means in the event of a power failure and its subsequent return, the relay contacts will be set to "off". This prevents the controlled receivers from being switched on automatically without supervision after a prolonged power failure.

## Mounting

1. Disconnect the power supply.
2. Fix the relay on a rail in the control box.
3. Connect the power wires to terminals 1-3 according to the diagram.
4. Momentary switches connected in parallel, connect to terminal 6 and to the "+" wire.
5. Connect the powered receiver in series to terminals 7-9 and 10-12.




BIS-411 2Z 24 V can not work with backlit buttons.

---

## Technical data

power supply	9÷30 V AC/DC
contact	separated 2×NO
maximum load current (AC-1)	2×8 A
control pulse current	5 mA
activation delay	0,1÷0,2 s
power supply indication	green LED
activation indication	red LED
power consumption	
standby	0.15 W
on	0.6 W
terminal	2.5 mm <sup>2</sup> screw terminals
tightening torque	0.4 Nm
working temperature	-25÷50°C
dimensions	1 module (18 mm)
mounting	on TH-35 rail
ingress protection	IP20

## Wiring diagram

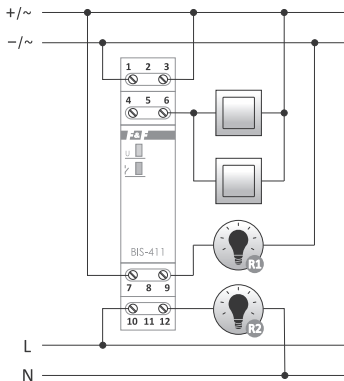






- 1-3 power supply of the relay 9÷30 V AC/DC
- 6 control input
- 7-9 contact 1 (active) NO
- 10-12 contact 2 (active) NO



## Power table

Table for loads supplied with 230 V AC:

				
tungsten	halogen	fluorescent	energy-saving	LED
1000 W	600 W	500 W	250 W	100 W

The above data are indicative and will heavily depend on the design of a specific receiver (that is especially important for LED bulbs, energy-saving lamps, electronic transformers and pulse power supply units), switching frequency and operating conditions.

For more information visit: [www.fif.com.pl](http://www.fif.com.pl).

## Warranty

The F&F products are covered by a warranty of the 24 months from the date of purchase. Effective only with proof of purchase. Contact your dealer or directly with us.

## CE declaration

F&F Filipowski L.P. declares that the device is in conformity with the essential requirements of The Low Voltage Directive (LVD) 2014/35/EU and the Electromagnetic Compatibility (EMC) Directive 2014/30/UE.

The CE Declaration of Conformity, along with the references to the standards in relation to which conformity is declared, can be found at [www.fif.com.pl](http://www.fif.com.pl) on the product page.