



F&F Filipowski sp. j.
Konstantynowska 79/81, 95-200 Pabianice, POLAND
phone/fax (+48 42) 215 23 83 / (+48 42) 227 09 71
www.fif.com.pl; e-mail: biuro@fif.com.pl

LK-714 10÷30V

Signal lamp,
2-state



Do not dispose of this device in the trash along with other waste! According to the Law on Waste, electro coming from households free of charge and can give any amount to up to that end point of collection, as well as to store the occasion of the purchase of new equipment (in accordance with the principle of old-for-new, regardless of brand). Electro thrown in the trash or abandoned in nature, pose a threat to the environment and human health.



Purpose

The signal lamp LK-714 is used for the optical indication of the operating statuses of the receiver, such as on/pause, open/closed, etc.

Functioning

The state of the controlled circuit or receiver is indicated by the lighting of the appropriate LED connected in parallel to this circuit or receiver.




If there is a need for additional protection of the lamps, it is recommended to use fuses (for example, of the type from BZ-1 to BZ-4, available in the F&F offer) with a value of 0.25÷1 A. Additional protection is recommended if the preceding protection is provided for currents of significant values (>16 A).

Mounting

1. Check phase sequence.
2. Disconnect the power.
3. Mount the lamp on the rail.
4. Connect according to the diagram.

Wiring diagram

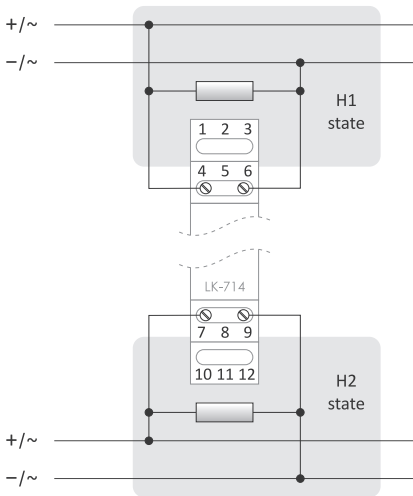

Technical data

power supply	10÷30 V AC/DC
rated current	2× 1.7 mA
states signalling	
H1 state	1× green LED
H2 state	1× red LED
power consumption	0.8 W
working temperature	-25÷50°C
terminal	2.5 mm ² screw terminals
tightening torque	0.4 Nm
dimensions	1 module (18 mm)
mounitng	on the TH-35 rail
ingress protection	IP20

Warranty

F&F products are covered by a 24-month warranty from the date of purchase. The warranty is only valid with proof of purchase. Contact your dealer or contact us directly.

CE declaration

F&F Filipowski sp. j. declares that the device is in conformity with the essential requirements of The Low Voltage Directive (LVD) 2014/35/EU and the Electromagnetic Compatibility (EMC) Directive 2014/30/UE.

The CE Declaration of Conformity, along with the references to the standards in relation to which conformity is declared, can be found www.fif.com.pl on the product subpage.

«F&F»[®]